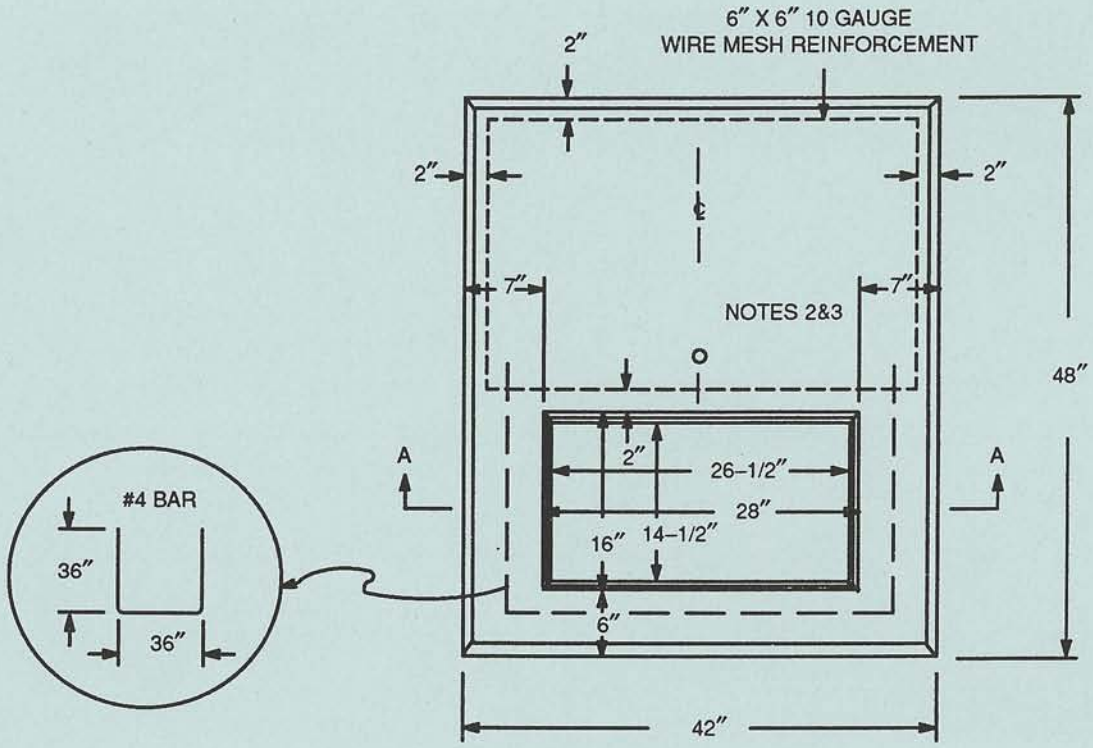

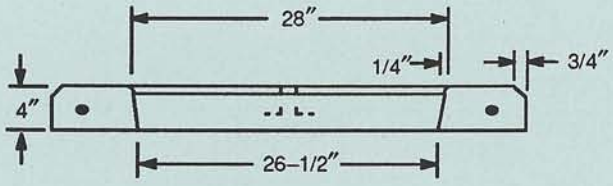

SECTION A–A

NOTES

1. Final 28 day concrete strength to be 5000 psi.
2. A 3/4 inch coil loop insert (Dayton F63) with an insert locator plug (Dayton T21) for lifting the pad at the center of gravity with a swivel plate.
3. Manufacturer's identification and month/year when manufactured shall be legibly marked in/on concrete in the top near the center.
4. Concrete and concrete design shall be in accordance with ACI 318–1986.

ORIGINAL 4/23/70 APPROVED 8/1/91 F.Stevens	**PAD – PRECAST CONCRETE – TRANSFORMER 167 KVA MAXIMUM – 42″ X 48″ X 4″**			
	NORTHEAST UTILITIES	MATERIAL SPECIFICATION	**SPC P–009**	**11**